


Original

Labeller with a speed of 50 mt/minute

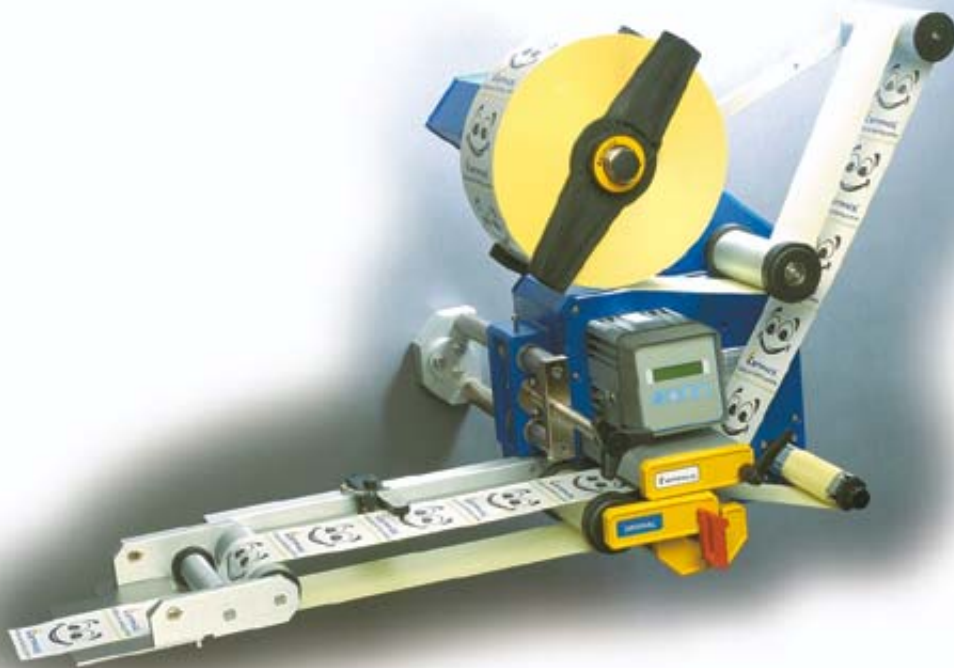

Original embodies the tradition of all Etipack labellers, solid to last in time, reliable to meet every requirement, easy to use. Like the other labellers manufactured by Etipack, the body of the machine is in aluminium casting. The electronics, at different levels, is located in the rear part of the machine, to reduce the bulk and to make the installation in the production lines easier. Maintenance and cleaning of the drawing rollers are easy and quick.

The high performances of the labeller Original are ensured by the use of technological solutions which, proved to be winning in the past, have been improved to obtain the highest efficiency, such as the stepper motor, the keypad for the setting of machine functions, the switching technology for the stabilizing of the input current.

Technical specifications

Dispensing speed

max 50 mt/min / Original 1.3
max 20 mt/min / Original 2.5
max 50 mt/min / Original 2.5 RM
5-17 mt/min / Original 1.3 PN, pneumatic version
5-15 mt/min / Original 2.5 PN, pneumatic version
stepper motor

Motorization

Compressed air

Dispensing width

6 bar with printing unit
min 8 mm, max 128 mm / Original 1.3
min 8 mm, max 248 mm / Original 2.5

Outside reel diameter

Inside reel diameter

Machine size

280 mm, optional 380 mm
40-75 mm
length 1015, width 564, height 738 mm / Original 1.3
length 1015, width 684, height 723 mm / Original 2.5

Power supply

Electrical input

Electrical protection

Noise level

115/230/240 Volt, 50-60 Hz
150 W
Ip55
70dB